



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R3W
SEC 36
1/4
SEC 1
T2S
U.S.B.&M.

A-23



Z-23

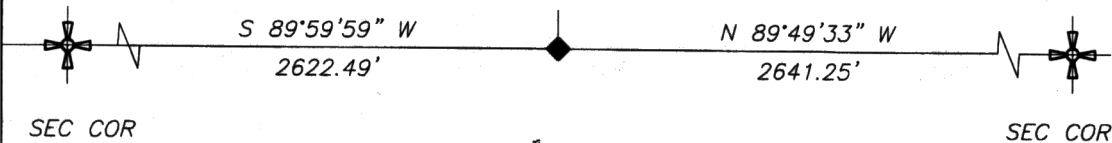

SCALE: 1"=30'
0' 30'


NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (1/4 CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND B.I.A. GALVANIZED PIPE AND CAP

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

TIED MONUMENT INTO VRS CONTROL NETWORK

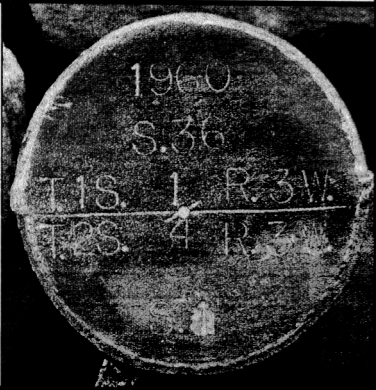

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N:7297094.353
E:2010815.806


LATITUDE: 40°20'41.475" N
LONGITUDE: 110°10'15.874" W
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. 640100

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Aug '09

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

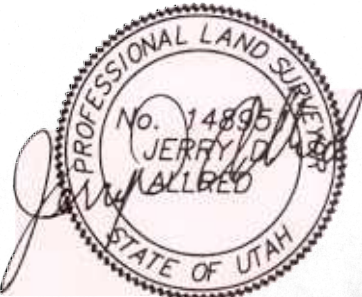

DUCHESNE COUNTY SURVEY MONUMENT RECORD

SKETCH SHOWING MONUMENTS AND TIES

T1S
R3W
36
1/4 —●—
1
T2S
U.S.B. & M.
1990



Z X-23



DESCRIPTION OF CORNER EVIDENCE FOUND

Found 3" dia. galvanized pipe with cap stamped:

	1960	
	S 36	
T1S	1	R3W
	/	
T2S	4	R3W
	S 1	

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Date 26 Dec 1990

Jerry D. Allred
Signature of Surveyor

3817
Reg. No.